


## FLEXIBLE

### WIRING DUCT

NAWA offers flexible duct that is designed for connecting panel and doors or other applications where cabling is subject to bending and twisting. The flexible duct comes in 50 cm lengths with a built in self-locking system that allows you to easily attach multiple sections. NAWA's flexible duct is insulating, shockproof and self-extinguishing. Made in compliance with UL 94 V2 and IEC 216 standards, it is flame resistant and thermal resistant to a constant 80°C, peaking up to 110°C. Ribs alternate and angle slightly inward to make it easier to insert and extract cables. Flexible wiring duct is made from Nylon 66 to ensure flexibility.

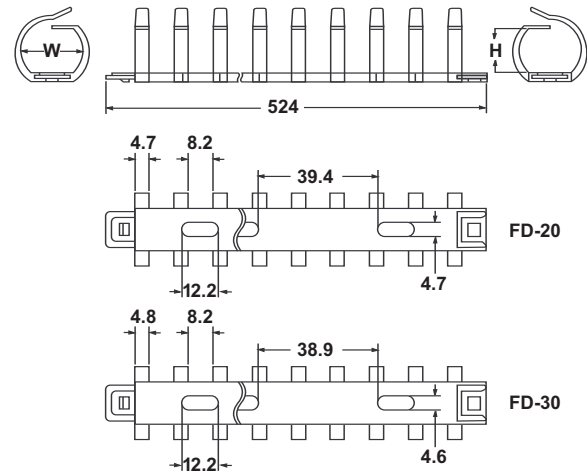

### FLEXIBLE WIRING DUCT

Part #	Nominal Size W x H Inches	External Dimensions		Length Inches (cm)	Carton Quantity	Total Length
		Width Inches (mm)	Height Inches (mm)			
FD-20	.75" x .5"	.80 (20.4)	.57 (14.4)	19.7 (50)	200	100 m
FD-30	1.25" x 1"	1.14 (29)	.98 (24.9)	19.7 (50)	200	100 m